Profec Butterfly valve ductile iron (GGG40) epoxy coating DN50 flange 10bar DN50 blue PN6/10/16 type 601 disc stainless steel 316 (0401865)




TECHNICAL SPECIFICATIONS

Colour	blue
Type	601
Material	ductile iron (GGG40)
Surface treatment	epoxy coating
Operation	lever
Colour lever	black
Handle material	malleable cast iron
Material valve	stainless steel 304
Material spindle	stainless steel 316
Seat material	EPDM
Material housing	ductile iron (GGG40)
Material seal	EPDM
Connection	flange
DIN Standard	DIN 2501
Flange	PN6/10/16
Temperature range	0°C - 90°C

Pressure	10 bar
Size	DN50
WebshopURL	https://www.bosta.com/en-gb/profec-butterfly-valve-ductile-iron-ggg40-epoxy-coating-dn50-flange-10bar-dn50-blue-pn6-10-16-type-601-disc-stainless-steel-316-0401865
DN	50
Width	43 mm
Height	275 mm
Torque	10 Nm

DIMENSIONS

Construction length	din 3202 k1, iso 5752
Ct-1	190 mm
PCD	110/125 mm
R	260 mm
W-1	43 mm
W-2	86 mm

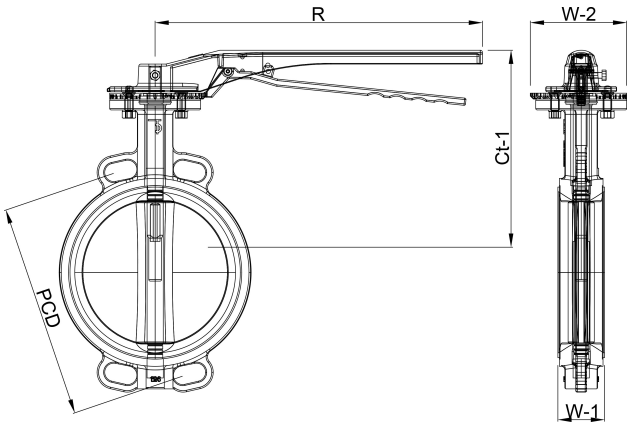

Last modified date: 31/10/2026

epco Ltd.
Unit C
Manston Lane
Leeds
LS15 8AH
T +44 (0) 113 2491155
E sales@epco-plastics.com