Profec Butterfly valve ductile iron (GGG40) epoxy coating DN125 flange 10bar DN125 blue PN6/10/16 type 601 disc stainless steel 316 (0401869)



PROFEC

epco


TECHNICAL SPECIFICATIONS

Colour	blue
Type	601
Material	ductile iron (GGG40)
Surface treatment	epoxy coating
Operation	lever
Colour lever	black
Handle material	malleable cast iron
Material valve	stainless steel 304
Material spindle	stainless steel 316
Seat material	EPDM
Material housing	ductile iron (GGG40)
Material seal	EPDM
Connection	flange
DIN Standard	DIN 2501
Flange	PN6/10/16
Temperature range	0°C - 90°C

Pressure	10 bar
Size	DN125
WebshopURL	https://www.bosta.com/en-gb/profec-butterfly-valve-ductile-iron-ggg40-epoxy-coating-dn125-flange-10bar-dn125-blue-pn6-10-16-type-601-disc-stainless-steel-316-0401869
DN	125
Width	54 mm
Height	377 mm
Torque	35 Nm

DIMENSIONS

Construction length	din 3202 k1, iso 5752
Ct-1	241 mm
PCD	200/210 mm
R	260 mm
W-1	54 mm
W-2	108 mm

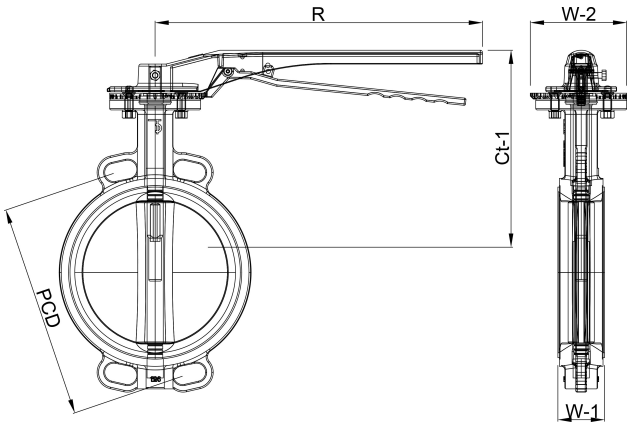

Last modified date: 31/10/2026

epco Ltd.
Unit C
Manston Lane
Leeds
LS15 8AH
T +44 (0) 113 2491155
E sales@epco-plastics.com