Profec Butterfly valve ductile iron (GGG40) epoxy coating DN65 flange 10bar DN65 blue PN6/10/16 type 601 disc stainless steel 316 (0401866)




TECHNICAL SPECIFICATIONS

Colour	blue
Type	601
Material	ductile iron (GGG40)
Surface treatment	epoxy coating
Operation	lever
Colour lever	black
Handle material	malleable cast iron
Material valve	stainless steel 304
Material spindle	stainless steel 316
Seat material	EPDM
Material housing	ductile iron (GGG40)
Material seal	EPDM
Connection	flange
DIN Standard	DIN 2501
Flange	PN6/10/16
Temperature range	0°C - 90°C

Pressure	10 bar
Size	DN65
WebshopURL	https://www.bosta.com/en-gb/profec-butterfly-valve-ductile-iron-ggg40-epoxy-coating-dn65-flange-10bar-dn65-blue-pn6-10-16-type-601-disc-stainless-steel-316-0401866
DN	65
Width	45 mm
Height	300 mm
Torque	12 Nm

DIMENSIONS

Construction length	din 3202 k1, iso 5752
Ct-1	202 mm
PCD	130/145 mm
R	260 mm
W-1	45 mm
W-2	90 mm

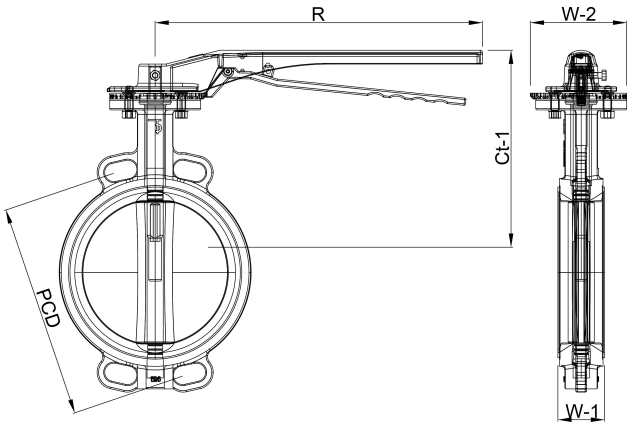

Last modified date: 31/10/2026

epco Ltd.
Unit C
Manston Lane
Leeds
LS15 8AH
T +44 (0) 113 2491155
E sales@epco-plastics.com