Profec Butterfly valve ductile iron (GGG40) epoxy coating DN200 flange 10bar DN200 blue PN6/10/16 type 601 disc stainless steel 316 (0401871)




TECHNICAL SPECIFICATIONS

Colour	blue
Type	601
Material	ductile iron (GGG40)
Surface treatment	epoxy coating
Operation	lever
Colour lever	black
Handle material	malleable cast iron
Material valve	stainless steel 304
Material spindle	stainless steel 316
Seat material	EPDM
Material housing	ductile iron (GGG40)
Material seal	EPDM
Connection	flange
DIN Standard	DIN 2501
Flange	PN6/10/16
Temperature range	0°C - 90°C

Pressure	10 bar
Size	DN200
WebshopURL	https://www.bosta.com/en-gb/profec-butterfly-valve-ductile-iron-ggg40-epoxy-coating-dn200-flange-10bar-dn200-blue-pn6-10-16-type-601-disc-stainless-steel-316-0401871
DN	200
Width	60 mm
Height	484 mm
Torque	195 Nm

DIMENSIONS

Construction length	din 3202 k1, iso 5752
Ct-1	298 mm
PCD	280/295 mm
R	360 mm
W-1	60 mm
W-2	120 mm

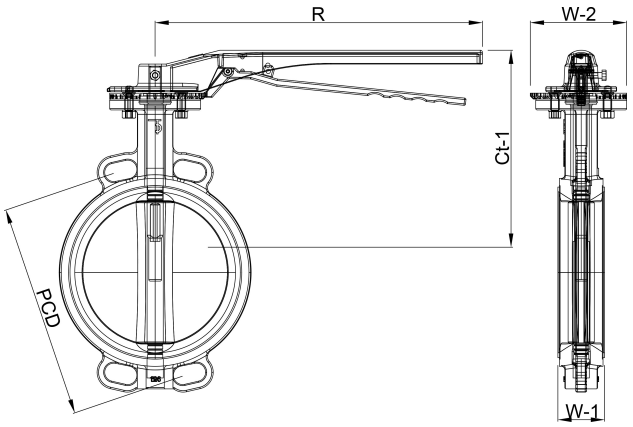

Last modified date: 31/10/2026

epco Ltd.
Unit C
Manston Lane
Leeds
LS15 8AH
T +44 (0) 113 2491155
E sales@epco-plastics.com