Profec Butterfly valve ductile iron (GGG40) epoxy coating DN250 flange 10bar DN250 blue PN6/10/16 type 601 disc stainless steel 316 (0401872)




TECHNICAL SPECIFICATIONS

Colour	blue
Type	601
Material	ductile iron (GGG40)
Surface treatment	epoxy coating
Operation	lever
Colour lever	black
Handle material	malleable cast iron
Material valve	stainless steel 304
Material spindle	stainless steel 316
Seat material	EPDM
Material housing	ductile iron (GGG40)
Material seal	EPDM
Connection	flange
DIN Standard	DIN 2501
Flange	PN6/10/16
Temperature range	0°C - 90°C

Pressure	10 bar
Size	DN250
WebshopURL	https://www.bosta.com/en-gb/profec-butterfly-valve-ductile-iron-ggg40-epoxy-coating-dn250-flange-10bar-dn250-blue-pn6-10-16-type-601-disc-stainless-steel-316-0401872
DN	250
Width	66 mm
Height	542 mm
Torque	300 Nm

DIMENSIONS

Construction length	din 3202 k1, iso 5752
Ct-1	330 mm
PCD	335/355 mm
R	360 mm
W-1	66 mm
W-2	132 mm

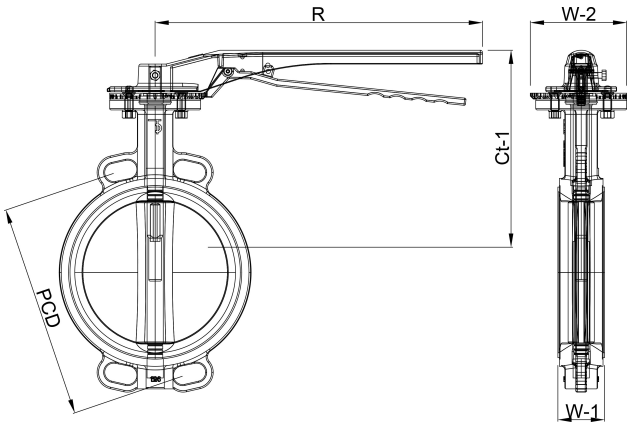

Last modified date: 31/10/2026

epco Ltd.
Unit C
Manston Lane
Leeds
LS15 8AH
T +44 (0) 113 2491155
E sales@epco-plastics.com