Profec Butterfly valve ductile iron (GGG40) epoxy coating DN100 flange 10bar DN100 blue PN6/10/16 type 601 disc stainless steel 316 (0401868)



PROFEC

epco


TECHNICAL SPECIFICATIONS

Colour	blue
Type	601
Material	ductile iron (GGG40)
Surface treatment	epoxy coating
Operation	lever
Colour lever	black
Handle material	malleable cast iron
Material valve	stainless steel 304
Material spindle	stainless steel 316
Seat material	EPDM
Material housing	ductile iron (GGG40)
Material seal	EPDM
Connection	flange
DIN Standard	DIN 2501
Flange	PN6/10/16
Temperature range	0°C - 90°C

Pressure	10 bar
Size	DN100
WebshopURL	https://www.bosta.com/en-gb/profec-butterfly-valve-ductile-iron-ggg40-epoxy-coating-dn100-flange-10bar-dn100-blue-pn6-10-16-type-601-disc-stainless-steel-316-0401868
DN	100
Width	52 mm
Height	351 mm
Torque	30 Nm

DIMENSIONS

Construction length	din 3202 k1, iso 5752
Ct-1	228 mm
PCD	170/180 mm
R	260 mm
W-1	52 mm
W-2	104 mm

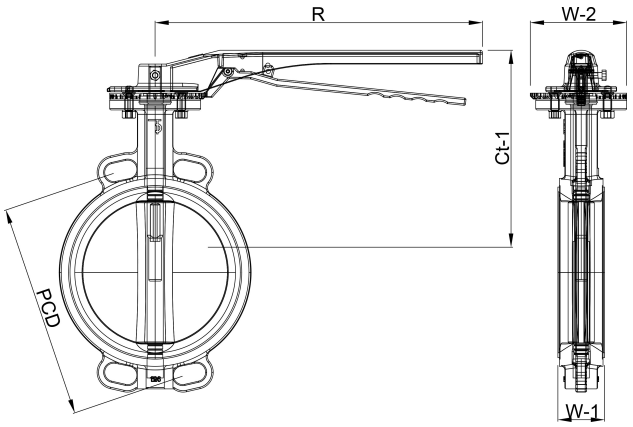

Last modified date: 31/10/2026

epco Ltd.
Unit C
Manston Lane
Leeds
LS15 8AH
T +44 (0) 113 2491155
E sales@epco-plastics.com